


KEL-ULTRA

115 mm / IP66 / IP68 / UL Type 12

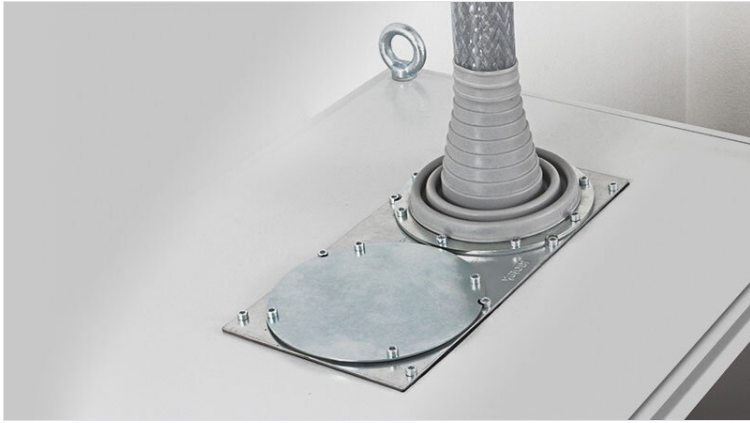

KEL-ULTRA flex cable gland is designed for use in hazardous areas. KEL-ULTRA flex cable gland is 25% UL Type 12 certified. It is suitable for use in hazardous areas. It is suitable for use in hazardous areas.

KEL-ULTRA flex cable gland

25% UL Type 12 certified.

It is suitable for use in hazardous areas.

IP54

IP55

IP64

IP65

IP66

UL TYPE 12

UL US

RIWA

HL3 EN 45545-2

EN 61373

ECOLAB certified

UV ISO 4892-2A

RoHS compliant

REACH COMPLIANCE

Made in Germany

IP66


IP66 (EN 60529)

IP66 (EN 60529)

IP (EN 60529)	IP54, IP55, IP64, IP65, IP66
UL Type (UL 50E)	UL Type 12
	UL94-V0, IP66
	-40 C° to 100 C°
	IP66, IP68
IP66	IP66

IP66

KEL-ULTRA flex 1

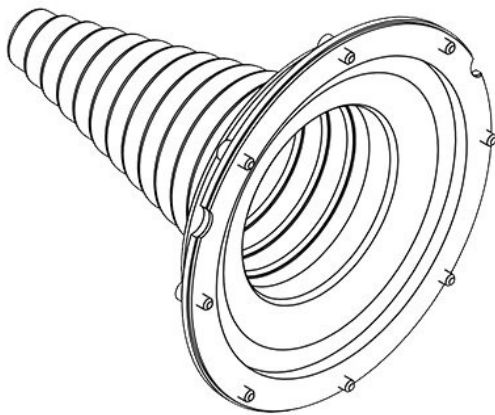

EAN

42630

4251269309052

1

IP66

1

IP66

90 mm

IP66

175,5 mm

175,5 mm

IP66

IP66

IP66

IP66

IP66

IP66


168 mm

140 mm

8

5,5 mm

1 x 25 - 90 mm

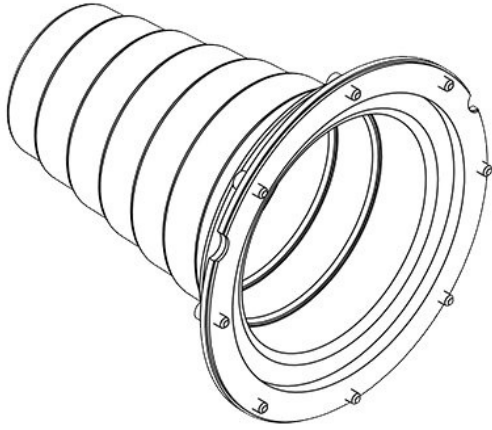

EAN

□□□ □
□□ □□□ □□

□□ □□

42631

4251269309069

1

1

115 mm

175,5 mm

175,5 mm

□□ □□□

□□ □□ □□□

□□ □□

□□□ □□

□□□ □□ □

168 mm

140 mm

8

5,5 mm

1 x 75 - 115 mm